CRT ADAPTER

B+K PRECISION

CR-32

SOCKET WITHOUT WIRES — 749-107-9-001

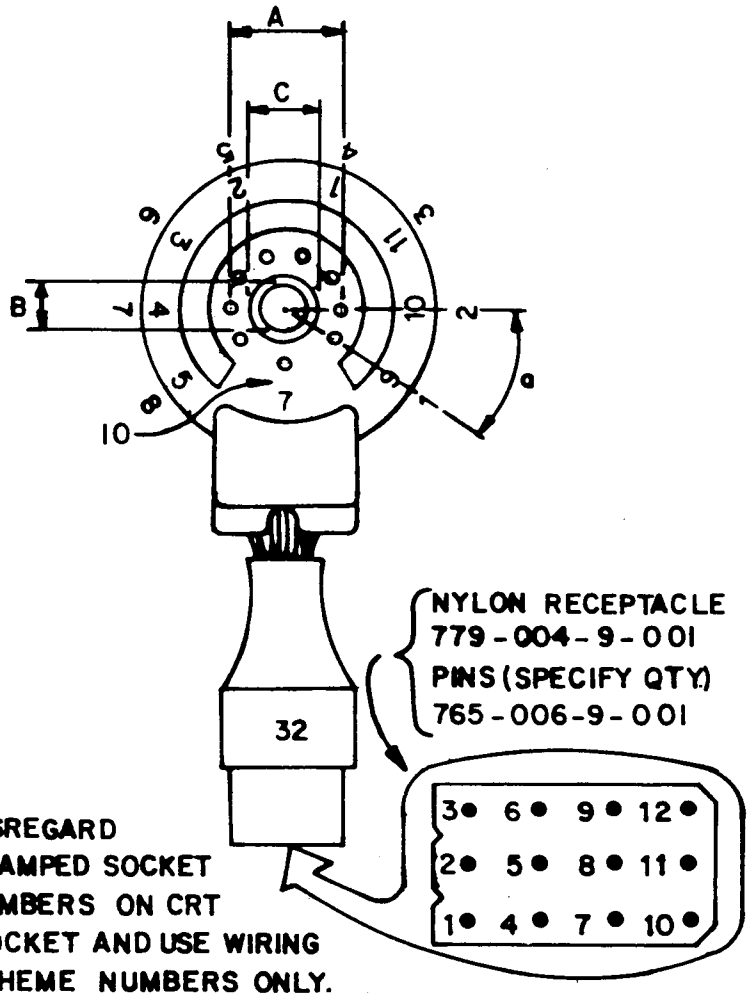

NOTE: DISREGARD STAMPED SOCKET NUMBERS ON CRT SOCKET AND USE WIRING SCHEME NUMBERS ONLY.

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEP-TACLE
1	ORG	6
2	RED	3
3	BLK	1
4	BRN	2
5	N.C.	---
6	GRN	8
7	YEL	7
8	BLU	9
9	---	---
10	WHT	12
11	---	---

FITS CRT DIMENSIONS:

A = pin circle diameter = 12.0 mm/0.472" nom.

a = angular pin spacing = 32.7°

B = post diameter = 5.51 mm/0.217" max.

C = post shoulder diameter = 8.51 mm/0.335" max.

B+K PRECISION DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
4050 N. Ravenswood Ave.
Chicago, Illinois 60613
(312) 327-7270
Telex # 25-3475

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE
85XB22	6.0
140BYB22	6.0
150BMB22	6.0
160CB22	6.0
160DB22	6.0

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
4050 North Ravenswood Avenue
Chicago, Illinois 60613
Telephone #: (312) 327-7270
Telex #: 25-3475

For information on ordering a subscription.

B+K PRECISION DYNASCAN CORPORATION

6460 West Cortland Street
Chicago, Illinois 60635

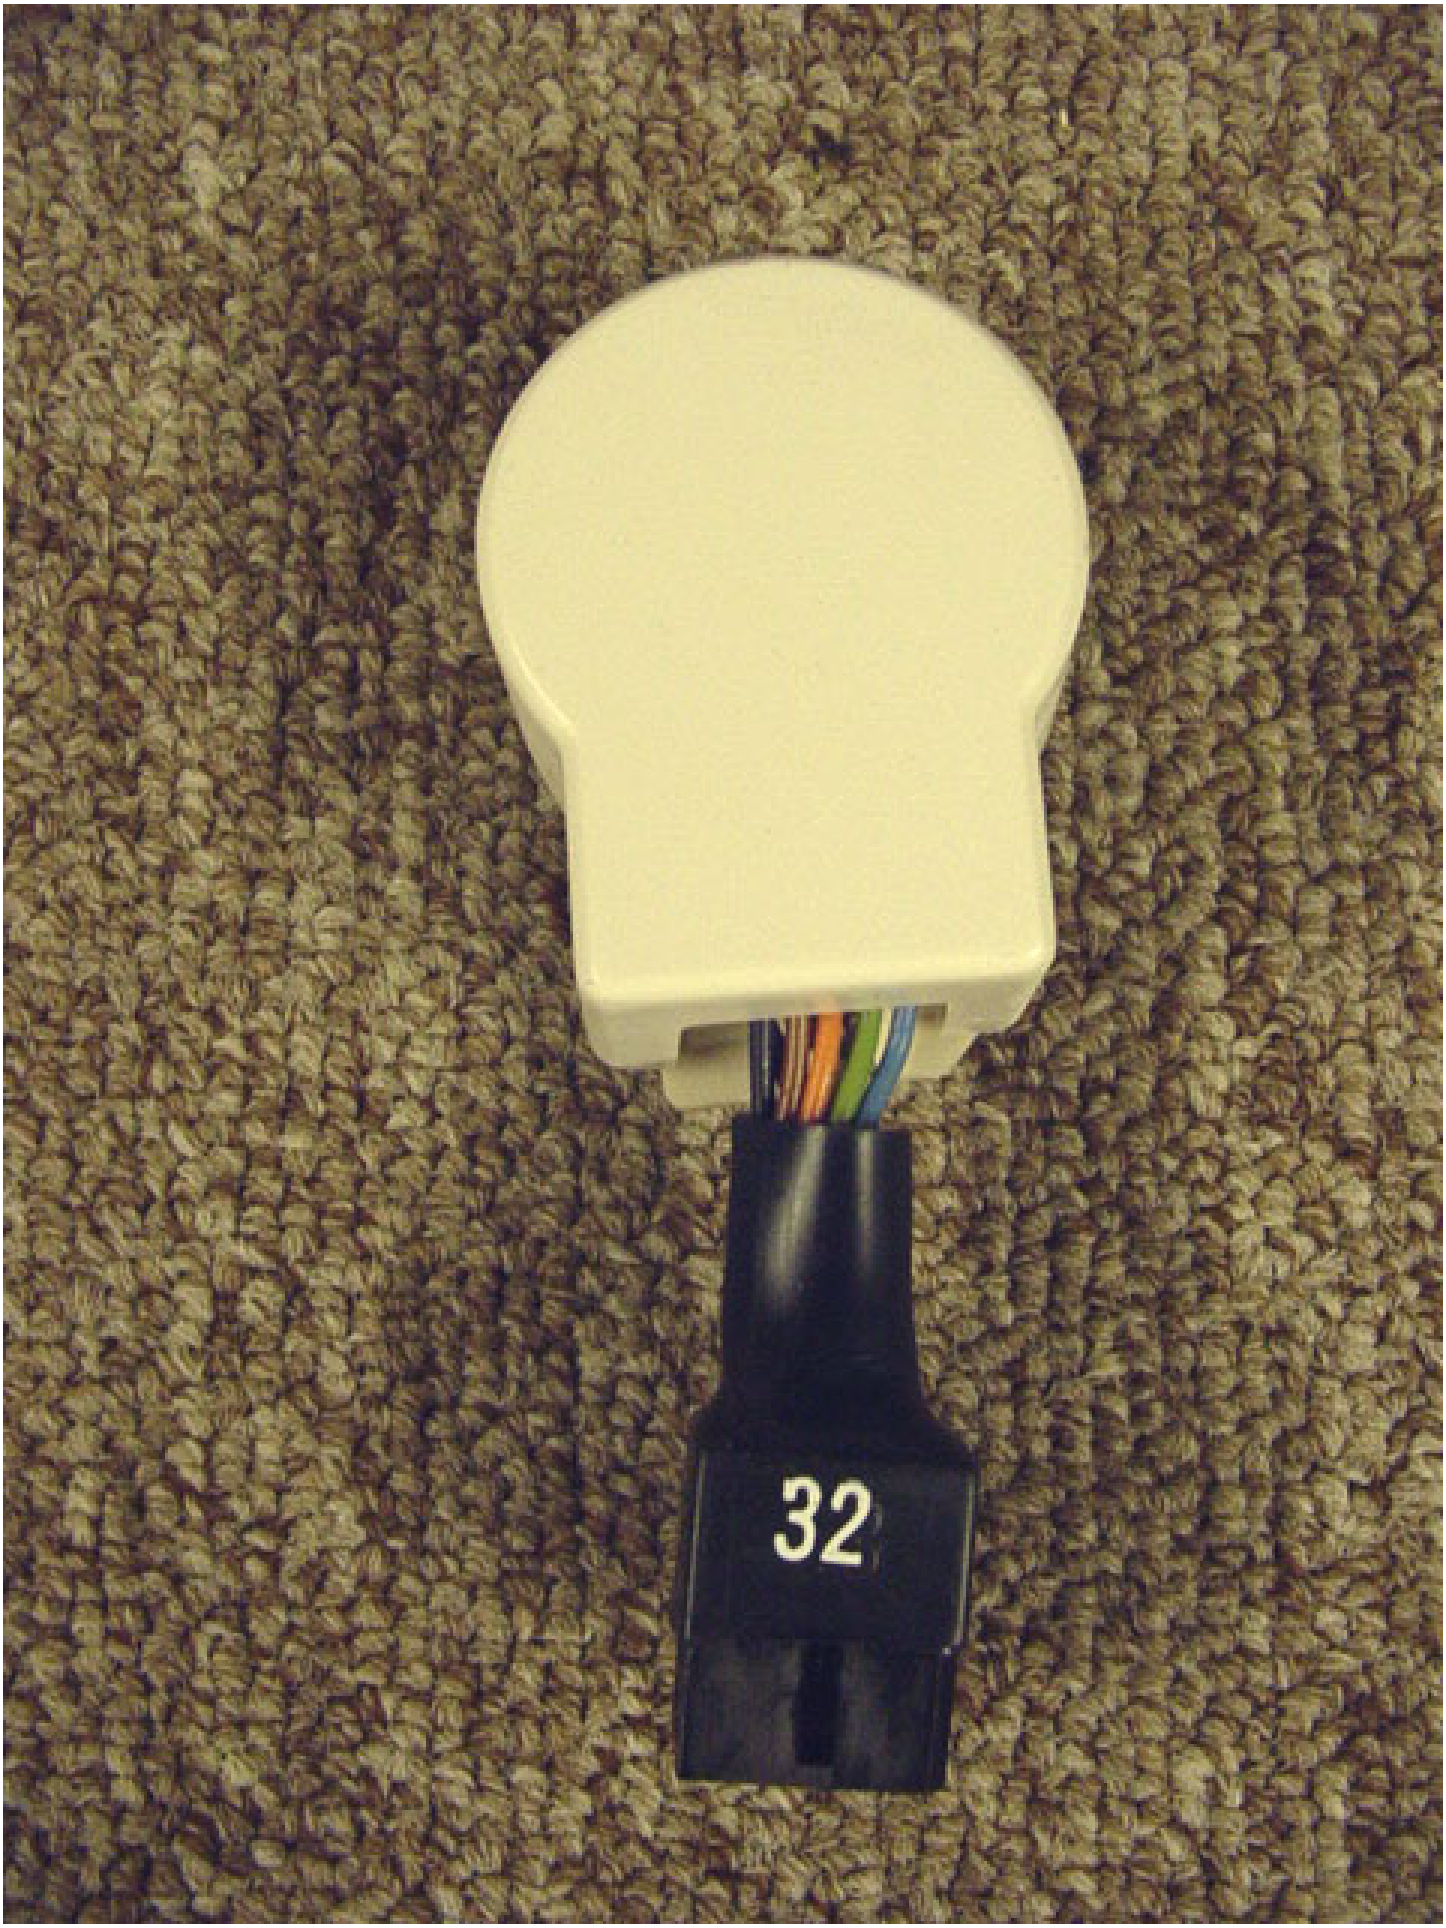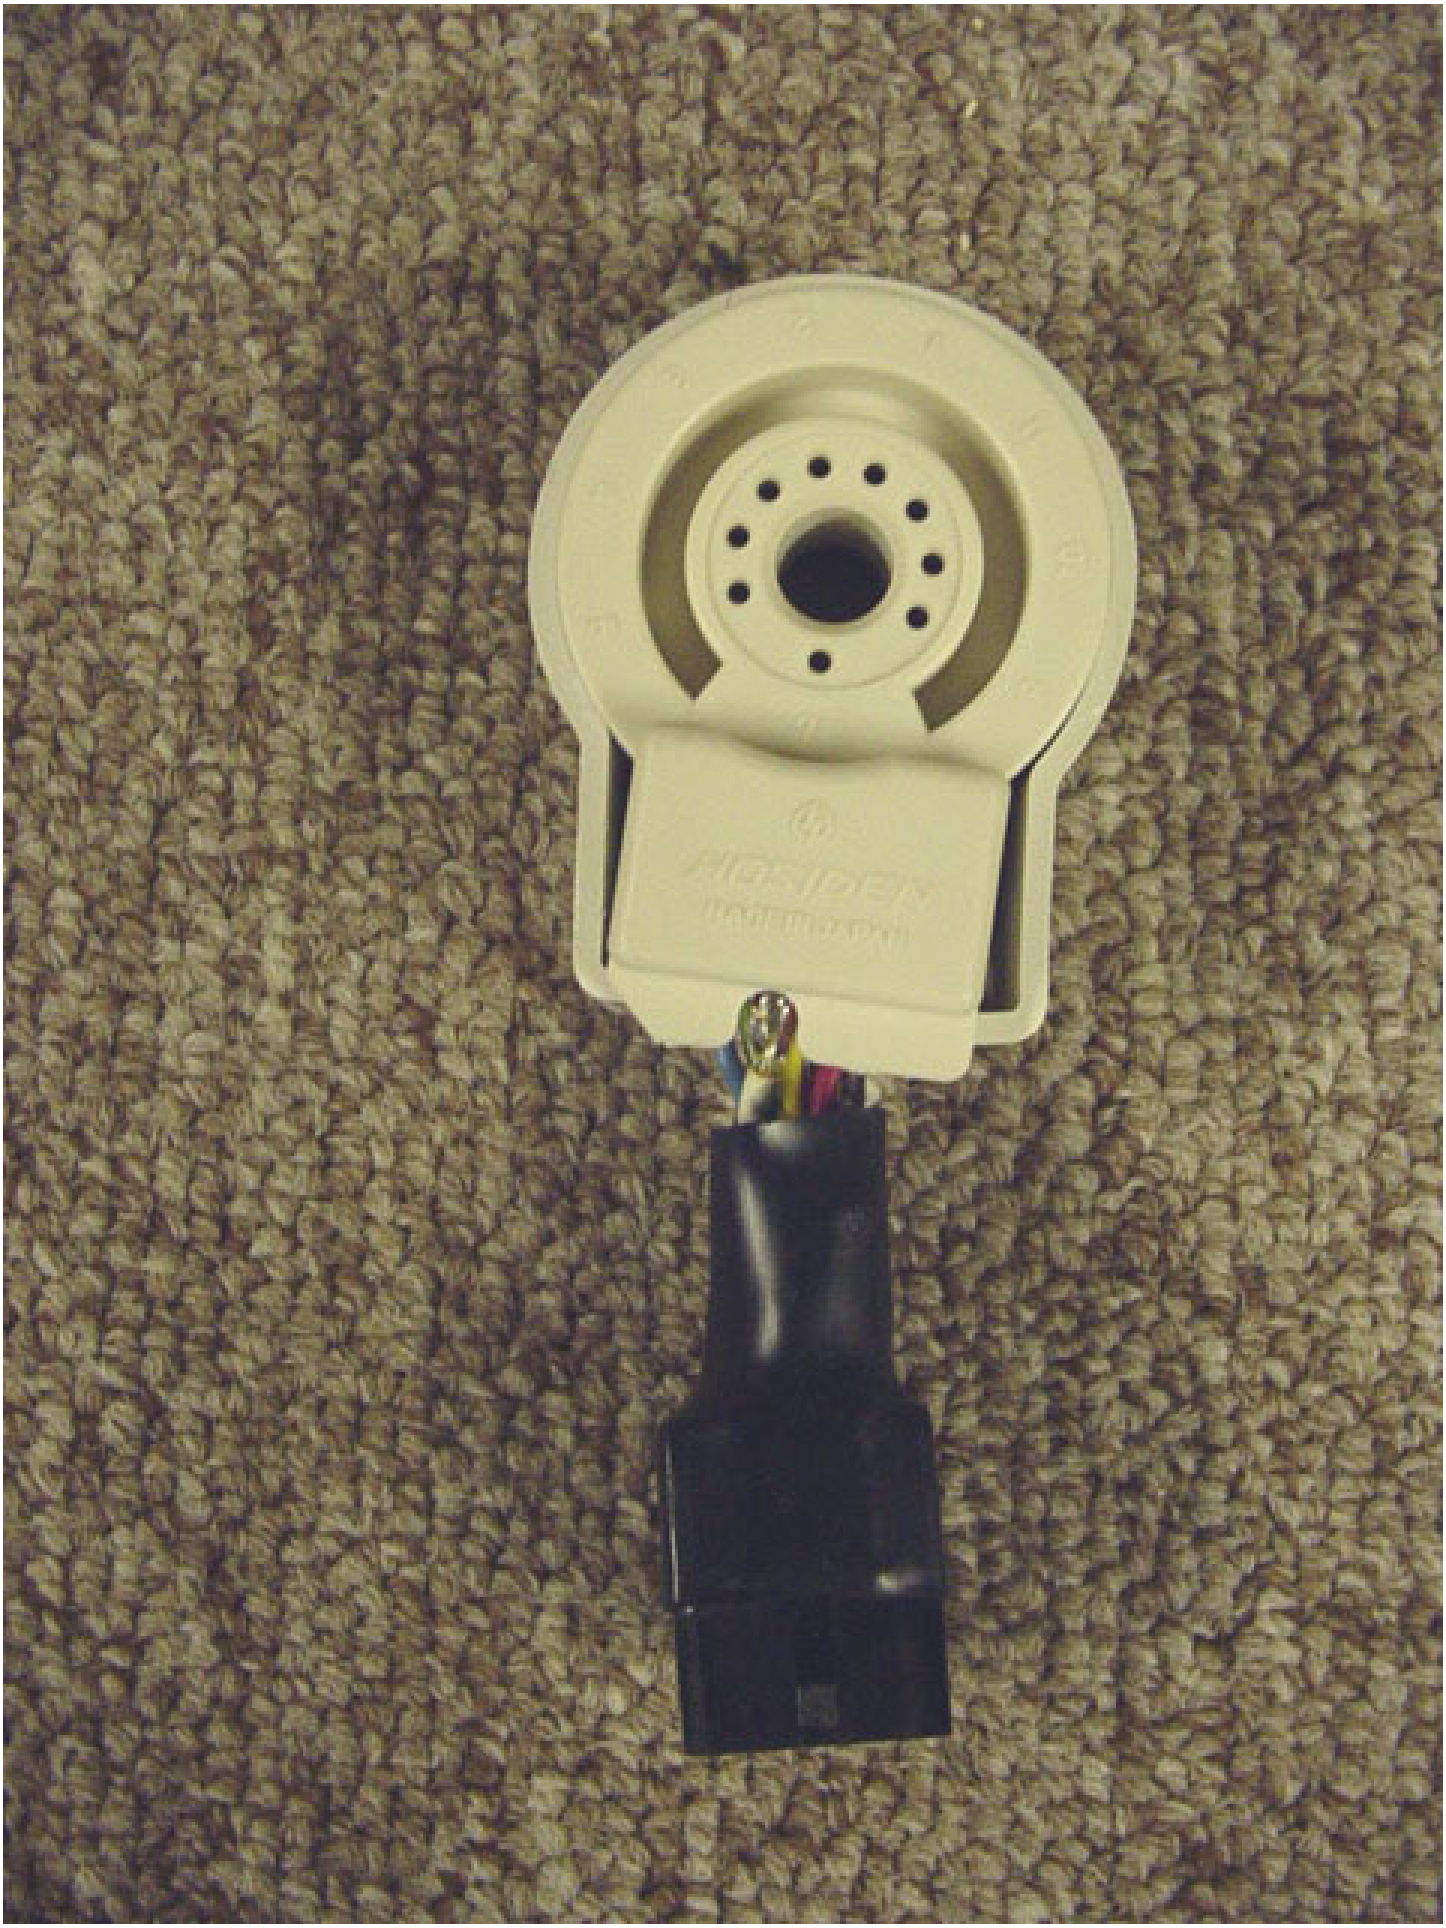
32